

### ENGINE

Iveco Cursor E4  
SCR (Selective Catalytic Reduction)  
Type: Turbocharged, aftercooled, electronically direct injected fourstroke diesel Iveco Turbo Brake (ITB).  
Number of cylinders: 6.  
RAC HP rating: 67.8.  
Total displacement: 12.9 litres.  
Maximum output: 450hp/336kW @ 1900rpm.  
Maximum torque: 1622lb ft/2200Nm @ 1000rpm.  
Dry-element air cleaner and gantry-mounted exhaust (LHS) with vertical catalytic muffler.  
*Optional:*  
500hp/373kW.  
1696lb ft/2300Nm.  
560hp/418kW.  
1840lb ft/2495Nm.

### TRANSMISSIONS

Iveco EuroTronic II 16AS2630 TO OD automated 16-speed overdrive.  
Two-pedal operation with automatic or manual shift control.  
(Rev: 13.07/10.81:1, 1st:14.12:1, 16th: 0.83:1)  
All with oil cooler.

### REAR AXLE

Meritor RT46-160GP  
Capacity: 20.9 tonnes.  
Ratios: 3.58, 3.73, 4.10.  
Driver controlled differential locks.  
*Optional:*  
Meritor RT50-160GP (560HP Prime Mover only)

### REAR SUSPENSIONS

Hendrickson Primaax PAX 460  
Type: Air.  
Capacity: 18.0 tonnes.

### CLUTCH

Self-adjusting single-plate with air assisted hydraulic actuation.  
Diameter: 430mm.

### FRONT AXLE

Iveco 5876  
Type: Forged steel I-beam.  
Capacity: 7.5 tonnes.

### FRONT SUSPENSION

Type: Three-leaf parabolic springs.  
Double acting telescopic shock absorbers.  
Capacity: 7.0 tonnes.

### BRAKES

Type: 2-circuit air system.  
Front: 432mm Knorr disc brakes.  
Rear: Meritor S-Cam 419mm diameter x 178mm drum brakes with automatic slack adjusters.  
Brake lining area: 5600cm<sup>2</sup>.  
*Optional:*  
Knorr SN7 Rear Disc Brakes on rear axles.  
100-litre aluminium air reservoirs.  
Dessicant type air dryer/pressure regulator.  
Semi-trailer air connections.  
Wabco E 4-channel ABS/EBL with ASR.  
Trailer ABS facility.

### STEERING

ZF 8098 power-assisted with gear-driven pump.  
460mm diameter adjustable steering wheel.

### FUEL SYSTEM

Aluminium tanks.  
2 x 450 litres of fuel = 900 litres.  
1 x 100 litres AdBlue.  
Fuel Pro primary filter.  
*Optional:*  
450 litres + 200 litres fuel/250 litres oil = 650 litres.  
2 x 450 litres + 360 litres + 240 litres = 1500 litres. (Prime Mover only)

### CHASSIS

Type: 257x89x8mm parallel-section high-tensile steel channel.  
Yield strength: 760 MPa.  
Section modulus: 243cm<sup>3</sup>  
FRP painted airdam bumper: (No FUPD)  
Tapered rear of frame with fifth wheel mounting angles.  
*Optional:*  
Square end of frame with trailer connections to ROF.  
Deckplate.  
Bocar Polished aluminium bull bar with Fog and Driving lights, covers & FUPD.  
Bocar Polished Alloy Bumper with Fog and Driving lights, covers & FUPD.

### ELECTRICAL SYSTEM

Type: 24-Volt, negative to earth.  
Multiplex computerised CANBUS integrated wiring and systems control network with centralised colour display, controls and diagnostics.  
Batteries: 4 x 560 amps SAE cold cranking current per battery, with remote isolation switch mounted behind cab.  
Alternator: 24V, 90 amps.  
Headlamps: 70/75 watt, with covers.  
Rear flood light.  
Semi-trailer HD ISO 7-pin socket.  
12 Volt power outlet in dash.  
Cab marker lights.  
Trailer connections.  
24-12 Volt converter for trailer lighting.  
70 Watt fog and driving lamps with covers.  
Tail light brackets and mudflaps.

### WHEELS AND TYRES

Wheels: 8.25DC x 22.5 10-stud 335mm steel disc.  
Front tyres: Michelin XZE2+ 295/80R22.5.  
Rear: Michelin XDE2, 11R22.5.  
Spare: Wheel without tyre.  
*Optional:*  
Alcoa 8.25DC x 22.5 10 stud 335mm PCD alloy disc. Plain or Durabright finish.

### COOLING SYSTEM

Radiator frontal area: 8400cm<sup>2</sup>.  
Charge air cooler frontal area: 5700cm<sup>2</sup>.  
Two-speed electronic magnetic fan, controlled by VCM and Mux system.

### DRIVELINE

Spicer 1810 Series main driveline with Spicer 1710 Series interaxle.

## CAB

### Construction

Iveco ActiveTime 2280mm wide, all steel, conventional control sleeper cab with low roof.  
Four-point cab mounting system with air suspension and dampers at rear.

### Features

ActiveTime sleeper bunk with 2090mm x 715mm lower sleeper bunk with 150mm thick mattress. Privacy curtains for windows and bunk area. Lockers below lower bunk with access from cab and external access door lh sides. External stowage lockers under sleeper both sides. Stowage lockers in overhead console above windscreen. Fully adjustable ISRI self levelling air suspension driver's seat with headrest, adjustable shock absorber and integral lap-sash retractorseat belt. Fixed passenger seat with lap sash retractor seat belt. 90° opening doors with electrically operated window and low-level visibility forward window.

### Accessories

Two internal sun visors with shade cloth blinds on side window.  
Dark grey acrylic exterior sunvisor.  
Aerodynamic powered and heated mirrors, with a flat and convex spotter mirror on each side and a kerb view mirror on the passenger side.  
Climate control Air conditioning.  
Heater demister with 4-speed fan. Demist ducts to door glasses.  
2-speed and intermittent action twin windscreen wipers/washers.  
AM/FM radio/CD player with steering wheel controls.  
Dual roof-mounted air horns.  
Iveco Colour Display (ICD) instrument panel with Electronic speedometer and tachometer; fuel level gauge, engine coolant temperature gauge, and ICD displays for air pressure, system voltage, engine oil level, pressure and temperature, engine coolant temperature. Warning lights in ICD for power divider, difflocks, park brake, engine brake, high beam, fog and driving lights, parking lights, turn signal, hazard lights, low air pressure, brake system fault, park brake, mirror heaters. The ICD also gives information on Hi-Fi settings and control, Clock and alarm settings, trip data and trip computer, diagnostics, mirror adjustments and Eurotronic transmission functions.  
AdBlue level.  
Air controls mounted in centre dash console for park brake, inter-axle locks cross-diff locks and rear air suspension dump.  
Cruise control.  
Gear control lever on steering column.

## Finish

White painted cab and bumper with grey fenders. Cab treated with anti-corrosion protection and metallic joints treated with vinyl sealant. Insulation on cab underbody.

### Optional:

2090mm x 760mm lower sleeper bunk with 150mm thick mattress.  
ISRI self levelling air suspension passenger seat with headrest, adjustable shock absorber and integral lap-sash retractor seat belt  
Medium Roof sleeper with standing room height interior, including electrically operated clear sun roof hatch with blind, stowage lockers in front section of medium roof, and stowage bins in side of medium roof section  
Upper bunk for medium roof sleeper.  
Aerodynamic roof deflectors and cab side extenders.

## MASS RATINGS

GVM 24.5 tonnes.  
GCM 65.0 tonnes.  
Optional GCM\* 90.0 tonnes

Chassis mass front: 4.27 tonnes  
Chassis mass rear: 3.43 tonnes  
Chassis mass total: 7.70 tonnes  
Chassis with RT46-1 60GP axles, oil and coolant, but no fuel, spare wheel or tyre.

\*Suitably rated engine, transmission and suspension components are required.

## SUSPENSION (dimensions in mm)

	B	C	D Laden	D Unladen	E
PAX460	658	665	1005	1030	105


## CHASSIS DIMENSIONS (dimensions in mm)

WB	4800	5000
GC(Front)	273	273
GC(Rear)	242	242
AF	1420	1800
CA	2050	2250
CF	3470	4050
L	7440	8020
Turning circle**	17200	17900

\*\* For wall to wall, add 850mm

## Cab Style (dimensions in mm)

	H	H (aero kit)
Low Roof Sleeper	2980	4000
Medium Roof Sleeper	3615	4000

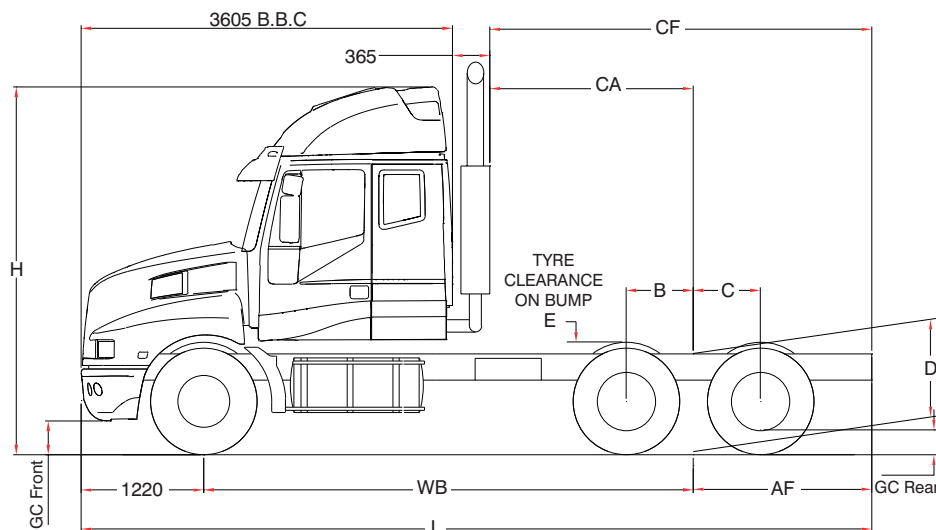

# IVECO