

NEW DAILY 70C

NEW DAILY
BUSINESS ↗
INSTINCT ↗



E6

The new Daily E6 70C Van is the right choice to develop your business. With its new Euro 6 engine providing exceptional fuel consumption and cost of ownership, combined with increased class leading comfort, the new Daily E6 70C Van is your perfect business partner.

IVECO

Your partner for sustainable transport

DAILY SPECIFICATIONS 70C

DIMENSIONS (mm)

X	Wheelbase	4100	4100	4100L
H	Overall height unladen	H2/ 2850	H3/ 3050	H3/ 3050
K	Overall length	7224	7224	7498*
	Front track	1725	1725	1725
	Rear track	1660	1660	1660
Y	Rear overhang	2116	2116	2390*
	Turning circle: kerb to kerb	14108	14108	14108
	Turning circle: wall to wall	14758	14758	14758

CARGO AREA (mm)

	Volume (m ³)	16	18	20
	Internal length	4680	4680	5125
	Internal width	1740	1740	1740
	Internal height	1900	2100	2100
T	Height of loading floor	901	910	919
	Wheel house distance (int.)	1032	1032	1032
	Rear door opening width	1530	1530	1530
	Rear door opening height	1800	2000	2000
	Side door opening width	1260	1260	1260
	Side door opening height	1800	1800	1800

MASS (kg)

GVM	7000	7000	7000
GCM	10500	10500	10500
Towing capacity with braked trailer	3500	3500	3500
Front axle capacity	2500	2500	2500
Rear axle capacity	5350	5350	5350
Kerb mass front axle	1522	1551	1520
Kerb mass rear axle	1414	1472	1556
Kerb mass total*	2936	3023	3076
Payload capacity	4064	3977	3924

* Kerb masses are with minimal fuel, spare wheel, tools and no driver.

ENGINE

Type: 180hp IVECO FIC (EURO VI) – 4 stroke diesel with direct-injection, Variable Geometry Turbocharger (VGT) and intercooler.

Maximum Output: 180hp/132kw @ 2800-3500 rpm

Maximum Torque: 317 lb ft/430Nm @ 1500-3000 rpm

Emissions Technology: Exhaust Gas Recirculation system + Selective Catalytic Reduction

Total Displacement: 3.0 litre

Exhaust: Horizontally positioned muffler on the right side and tailpipe located mid-way down right side of vehicle

FRONT AXLE & SUSPENSION

IVECO 5823

Suspension Capacity: 2500 kg

Suspension Type: Independent with adjustable steel torsion bar

Axle Capacity: 2500 kg

REAR AXLE & SUSPENSION

IVECO 450517 full-floating single reduction

Suspension Capacity: 5350 kg

Suspension Type: Rear parabolic spring

Optional: ECAS - Rear air suspension

Axle Capacity: 5350 kg

Rear Axle Ratio: 4.30:1

Optional: Driver Controlled Differential Lock

BRAKES

Type: ESP 9 + ABS + ASR 9 with EBD (Electronic Brake force Distribution) and Hill Holder

Front / Diameter: Disc brakes / 301 mm

Rear / Diameter: Disc brakes / 306 mm

Parking Brake: Manual brake operating on rear axle

Service Brakes: Dual circuit with vacuum servo

- Pad wear warning light for front and rear brakes

STEERING


- Power steering
- 390mm diameter steering wheel with telescopic adjustment

FUEL SYSTEM

- 100 litres with fuel cap location on passenger side and 24 litre Ad Blue tank

CHASSIS

- C Section steel longitudinal side members and tubular cross members

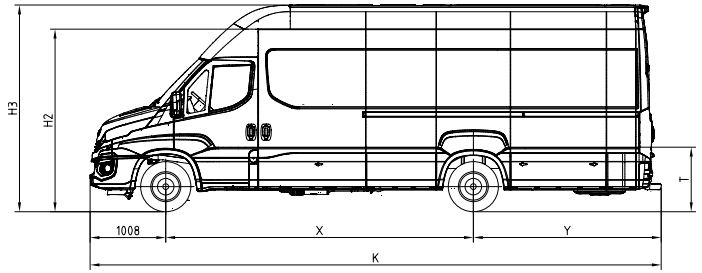

TRANSMISSION

- 6 speed synchromesh single overdrive manual transmission

Type: 2840.6 OD

1st 5.375, 2nd 3.154, 3rd 2.041, 4th 1.365, 5th 1.000, 6th 0.791 OD, Rev. 4.838

Optional:

- 8 Speed ZF Torque Converter Automatic (Hi-Matic with ECO mode)

Type: 8V470A

1st 4.696, 2nd 3.130, 3rd 2.104, 4th 1.667, 5th 1.285, 6th 1.000, 7th 0.839 OD, 8th 0.667 DOD, Rev. 3.297

CLUTCH

- Single dry plate
- Hydraulically controlled

Diameter: 280 mm

ELECTRICAL SYSTEM

Battery: 12V – 110 Ah

Smart Alternator: 12V – 180 A

- Trailer wiring to rear of chassis

WHEELS & TYRES

Wheels: Steel 6J x R16

Tyres: 225/75 R16

CABIN FEATURES

- Driver, passenger and curtain airbags with seat belt pretensioners
- Fixed driver seat and bench passenger seat
- Dual bench passenger seats with headrests, extractable table and storage underneath
- Cruise control
- Electric windows
- Exterior mirror with integrated wide angle and direction indicators, heated and electronically adjustable
- Overhead console with storage shelf
- Large dual storage pockets in doors
- Document storage compartment
- Body builder connections
- 2 beverage holders

DASHBOARD

- Analogue speedometer
- Analogue tachometer
- Fuel level indicator with reserve light indicator
- Coolant temperature indicator with high temperature indicator light
- Instrument light dimmer switch
- Dash-mounted gear lever
- 3 storage areas on top of dash
- LCD Display Panel includes: odometer, trip computer with distance, time, fuel consumption, headlamp orientation, clock, speed limit exceeding, external temperature and service indicator

SECURITY

- Central locking with remote control
- Steering lock
- Engine immobiliser

LOAD AREA

- Floor – steel ribbed with load lashing rings
- Sides – reinforced with load lashing rings
- Side access via top hung side sliding door, internal step and grab handle
- Rear access by hinged doors with stops at 90° and 270° (grab handle x2)
- Interior lights at side and rear (door operated with individual isolation)
- Rear doors with windows
- Full bulkhead with window

OPTIONS

- Dual sliding doors
- Heated, suspended and fully adjustable driver and single passenger seat
- ECO switch (manual transmission)
- Automatic climate control
- IVECONNECT multimedia system with reverse camera including MP3 player, USB and AUX connectivity, bluetooth with steering controls
- Lane departure warning
- Reverse camera
- #Rear Step (add 121mm to dimension Y & K)